



Head office

20 Arthur street north, Elmira, Ontario N3B 1Z9
Tel: (519) 669-4025 Fax: (519) 669-1436

Order desk

email: orders@walcoequipment.com
Tel: (519) 669-1401 Fax (519) 669-3499




Quebec office

364 RTE.122 St. Germain de Grantham, Québec J0C 1K0
Tel: (819) 395-5115 Fax (819) 395-2624
email: walcoqc@walcoequipment.com

SECTION

3-b

PAGE 1

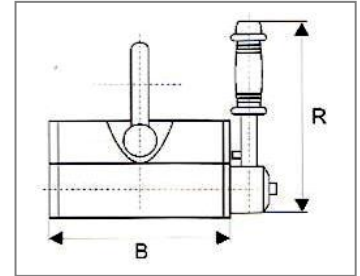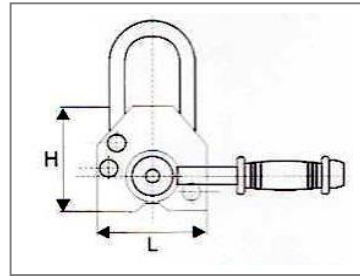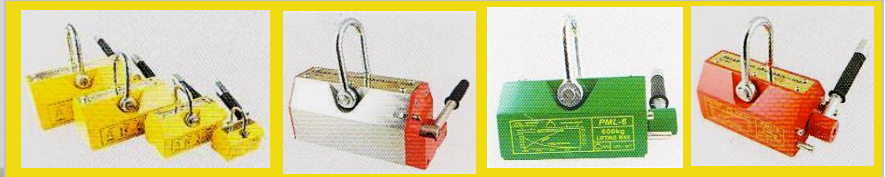

Magnetic lifters

WALCO ITEM #	PART #	RATED kg. LIFTING CAPACITY	CYLINDRICAL LIFTING CAPACITY	MAXIMUM PULL-OUT FORCE kg.	L mm	B mm	H mm	R mm	OPERATION TEMPERATURE C	WT./ kg.
614988	PML-100	100	30	350	60	100	70	126	80	3
614982	PML-300	300	100	1050	94	168	96	155	80	10
614983	PML-600	600	200	2100	120	222	116	196	80	24
614984	PML-750	750	250	2625	120	222	116	196	80	34
614985	PML-1000	1000	300	3500	132	273	120	285	80	36
	PML-1500	1500	500	5250	152	360	173	426	80	50
614986	PML-2000	2000	750	7000	152	460	173	426	80	70
614987	PML-3000	3000	1000	10500	286	458	261	521	80	86
	PML-6000	6000	2000	21000	430	600	355	730	80	120

Walco lifting clamps

ITEM #	MODEL	CAPACITY/TON	MIN/MAX JAW OPENING	WEIGHT
618700		.8	0 - 16 mm	
618701		1	0 - 22 mm	
618702		2	0 - 30 mm	
618703		3.2	0 - 40 mm	



Drum lifter

ITEM #	MAX LIFT CAPACITY	CHAIN LENGTH / DIAMETER	APROX. WEIGHT
615955	1 Ton	516 mm x 1/4"	8 lb.


For lifting steel drums with crane, electric hoist or chain block.

Danger:


Do not use with drum that has no grip edge, As grabs could slip.

Do not exceed working load limit (WLL).



One-touch grip



Up-right



Side angle

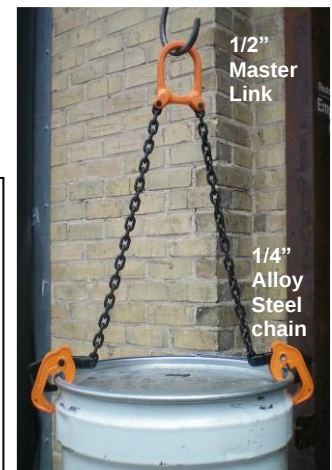



Head office 20 Arthur street north, Elmira, Ontario N3B 1Z9
Tel: (519) 669-4025 fax: (519) 669-1436

Order desk email: orders@walcoequipment.com
Tel: (519) 669-1401 fax (519) 669-3499

Quebec office 364 RTE.122 st. Germain de Grantham, Québec J0C 1K0
Tel: (819) 395-5115 fax (819) 395-2624
email: walcogc@walcoequipment.com

SECTION

3-b


PAGE 2

Weldless sling links

- ♦ Self coloured or hot galvanized
- ♦ Forged carbon steel - quenched & tempered

SIZE	STOCK #		W.L.L.	WEIGHT	DIMENSIONS IN INCHES				
Inches	G-341	S-341	Sgl. Pull	Each	B	C	D	E	F
A	GALV.	S.C.	lb.	lb.					
3/8	1013897	1013904	1800	13	1.13	.75	3.00	2.25	.38
1/2	1013913	1013922	2900	.55	1.50	1.00	4.00	3.00	.50
5/8	1013931	1013940	4200	1.10	1.87	1.25	5.00	3.75	.63
3/4	1013959	1013968	6000	1.95	2.25	1.50	6.00	4.50	.75
7/8	1013977	1013986	8300	2.78	2.63	1.75	7.00	5.25	.88
1	1013995	1014002	10800	4.30	3.00	2.00	8.00	6.00	1.00
1-1/4	1014011	1014020	16750	8.50	4.00	2.50	10.25	7.50	1.25
1-3/8	1014039	1014048	20500	11.50	4.13	2.75	11.00	8.25	1.38

Ultimate Load is 6 times the Working Load Limit.




Weldless end links

- ♦ Self coloured or hot dip galvanized.
- ♦ Forged carbon steel - quenched and tempered.

S-340, Form 5/16" Through 7/8" - Meet the Requirements of Federal Specification RR-C 271D Type XV

SIZE	STOCK #		W.L.L.	WEIGHT	DIMENSIONS"		
A	G-340	S-340	LB.	EACH	B	C	D
In.	GALV.	S.C.	LB.	LB.			
5/16	1014057	1014066	2500	.15	.50	1.75	1.18
3/8	1014075	1014084	3800	.23	.56	1.88	1.38
1/2	1014093	1014100	6500	.45	.75	2.38	1.81
5/8	1014119	1014128	9300	.95	1.00	3.25	2.32
3/4	1014137	1014146	14000	1.51	1.13	3.50	2.68
7/8	1014155	1014164	12000	2.75	2.00	5.13	3.75
1	1014173	1014182	15200	3.95	2.25	5.75	4.25
1-1/4	1014191	1014208	26400	7.30	2.50	7.00	5.00
1-3/8	1014217	1014226	30000	10.38	2.75	7.75	5.50

Ultimate Load is 5 times the Working Load Limit.




Weldless rings

Self colour - forged carbon steel - quenched and tempered

Weldless rings meet the requirements of Federal Specifications RR-C271D type VI


SIZE	S-643	W.L.L./lb.	WEIGHT/lb.	DIMENSIONS	
A	STOCK #	Sgl. Pull	EACH	B	C
INCHES	S.C.				
7/8x4	1013780	7200	2.70	4.00	5.75
7/8x5-1/2	1013806	5600	3.40	5.50	7.25
1x4	1013824	10800	3.50	4.00	6.00
1-1/8x6	1013842	10400	6.50	6.00	8.25
1-1/4x5	1013860	17000	7.00	5.00	7.50
1-3/8x6	1013888	19000	10.63	6.00	8.75

Ultimate Load is 6 times the Working Load Limit.



Weld on hook - D 16 Design factor 4:1

SIZE	WWL	WLL	B	E	F	H	WEIGHT	
	T.	LB.	IN.	IN.	IN.	IN.	LB.	REF. #
616501	2.00	4400	.91	3.82	3.58	1.06	1.85	D-1601R
616502	3.00	6600	1.14	4.61	4.13	1.22	2.60	D-1615R
616504	4.00	8800	1.34	5.16	4.49	1.42	4.19	D-1616R
616505	5.00	11000	1.34	6.34	5.24	1.77	5.62	D-1602R
616510	10.00	22000	1.93	8.07	6.61	2.24	11.02	D-1604R



DISTRIBUTED BY WALCO EQUIPMENT WHERE SAFETY AND SERVICE COME FIRST